


ZDS-FluidGlide™ · FG SERIES

ZDS-FG4018

Ultimate Acid-Storage Tank Liner

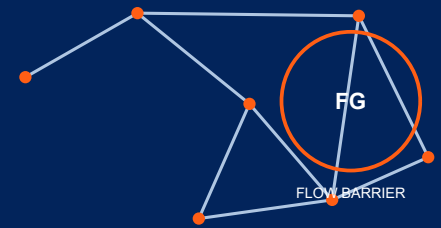

Product Description

Ultimate Acid-Storage Tank Liner

Service Temperature

80°C / 120°C

Mixing Ratio

A:B = 4:1

Cure Schedule

Tack-free: 20-24h, Full cure:...

Core Advantages

- ✓ Corrosion resistance
- ✓ Barrier protection against aggressive fluids
- ✓ Designed for demanding thermal service

Applications

Industrial pipelines, metal components; protective coating.

Technical Data

Bond strength	Grade 0-2
Hardness	>3H
Service Temperature	80°C / 120°C
Mixing Ratio	A:B = 4:1
Cure Schedule	Tack-free: 20-24h, Full cure: 7 days

Typical Application Parameters

Product Form	Coating
Mixed Color	Typical: Dark grey
Application Temperature	Recommended: 10°C to 35°C
Working Time (25°C)	Typical: 30-45 min
Recommended Layer	Recommended: 0.5-1.0 mm / coat
Initial Cure (25°C)	20-24 h

Application Guidance & Storage

- Surface preparation: Clean, sound and oil-free substrate; abrade metal or composites and remove dust before application.
- Application: Measure the stated ratio, mix until uniform, then apply and compact to minimise entrapped air.
- Environment: Keep the substrate at least 3°C above dew point. Cold extends cure; heat shortens working time.
- Storage & safety: Store sealed at 5-30°C in a cool, dry place; typical shelf life 12 months. Use gloves and eye protection; consult the SDS.

Application values marked Typical or Recommended are engineering guidance derived from the product type, stated performance and intended use. Confirm critical project parameters by application testing.