


ZDS-RubberElast™ · RE SERIES

ZDS-RE3000

High-Flex Rubber Restorer

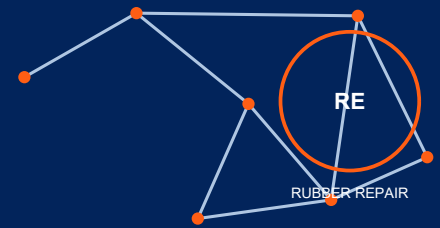

Product Description

High-Flex Rubber Restorer

Service Temperature

Typical: -30°C to +80°C

Mixing Ratio

A:B = 1:1

Cure Schedule

Working time: 2-3 min Load-be...

Core Advantages

- ✓ High wear resistance
- ✓ Resistance to chemical media
- ✓ Flexible, tear-resistant performance

Technical Data

Service Temperature	Typical: -30°C to +80°C
Mixing Ratio	A:B = 1:1
Cure Schedule	Working time: 2-3 min Load-bearing: 1 h Full cure: 3 h

Applications

Conveyor belts, protective linings; repair and rebuilding.

Typical Application Parameters

Product Form	Elastomeric repair material
Mixed Color	Typical: Black
Application Temperature	Recommended: 10°C to 35°C
Working Time (25°C)	2-3 min
Recommended Layer	Recommended: 2-10 mm
Initial Cure (25°C)	Typical: 15-30 min

Application Guidance & Storage

- Surface preparation: Clean and roughen rubber or metal; remove release agents, oil and dust. Use a compatible primer where required.
- Application: Measure the stated ratio, mix until uniform, then apply and compact to minimise entrapped air.
- Environment: Keep the substrate at least 3°C above dew point. Cold extends cure; heat shortens working time.
- Storage & safety: Store sealed at 5-30°C in a cool, dry place; typical shelf life 12 months. Use gloves and eye protection; consult the SDS.

Application values marked Typical or Recommended are engineering guidance derived from the product type, stated performance and intended use. Confirm critical project parameters by application testing.